



SHOP DRAWING NAME

ARCHITECT

GENERAL CONTRACTOR

EQUIPMENT INSTALLED BY  
ELEVATOR READY INC.  
5060 RITTER ROAD SUITE 3  
MECHANICSBURG, PA. 17055  
717-697-9174 PHONE

SPECIFICATIONS

500# DUMBWAITER

CAR SIZE 36" Dx 36" W x 48" H CODE 5  
CAPACITY 500 LBS. AT 35 F.P.M.  
1 WIRE ROPE 5,600 LBS  
1/4" x 8 x 19 IWRC TRACTION STEEL  
CAR CONSTRUCTION - AUTO STEEL  
COLOR SELECTION - BEIGE

- LIGHT IN CAR
- SHELF IN CAR (ADJUSTABLE)
- COLLAPSIBLE GATE
- LIP ON CAR
- IN USE LIGHTS
- ARRIVAL LIGHTS
- KEYSWITCH OPERATION
- DOOR OPEN ALARM
- ARRIVAL GONG
- STEEL FLOOR
- STABILIZER
- FORMICA FLOOR


NOTICE TO ELECTRICAL CONTRACTOR:  
BRING 4 #10 WIRES TO DISCONNECT  
30 AMP MAIN LINE FUSE  
SWITCH; (2)220, (1)NEUTRAL, (1)GND  
BRING 3 #14 WIRES TO SEPARATE  
DISCONNECT SWITCH; (1)110V, (1)NEUT.  
(1)GND, FOR ELEVATOR LIGHT

NOTE: ALL HOISTWAY CONSTRUCTION MUST  
COMPLY WITH NATIONAL, STATE, AND LOCAL  
CODES. PLEASE ADVISE INCDA OF ANY  
CHANGES NEEDED TO THE DRAWING FOR  
COMPLIANCE IN YOUR AREA.  
SWING TYPE SHAFT DOORS BY OTHERS

INCDA JOB #  
DEALER P.O. #  
DRAWING BY: CHANCE  
DATE:

DRAWING IDENTIFICATION NUMBER

DW0408T

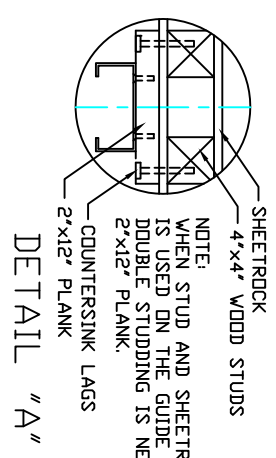

- TECHNICAL DATA:
1. REACTIONS ON ALL SHEAVES AND MOUNTINGS STATIC = 1,100 LBS.  
IMPACT = 2,200 LBS.
  2. RAIL FASTENING TO 2" x 12" PLANK #14 x 1 3/4" TYPE A SMS. RAIL IS PRE-DRILLED AT FACTORY.
  3. BOLT FASTENING OF CAR TO TROLLEY 1/2" - 13 x 4" SOCKET HD CAP SCREWS.

